

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 April 2005 (21.04.2005)

PCT

(10) International Publication Number  
**WO 2005/036077 A1**

(51) International Patent Classification<sup>7</sup>: **F25D 23/12**

(21) International Application Number:  
PCT/JP2004/014997

(22) International Filing Date: 5 October 2004 (05.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2003-351023 9 October 2003 (09.10.2003) JP  
2003-350931 9 October 2003 (09.10.2003) JP  
2003-350533 9 October 2003 (09.10.2003) JP

(71) Applicant (for all designated States except US): **MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD.**  
[JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka  
571-8501 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HIMORI, Nobuaki.**

(74) Agents: **IWAHASHI, Fumio** et al.; c/o Matsushita Electric Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: REFRIGERATOR

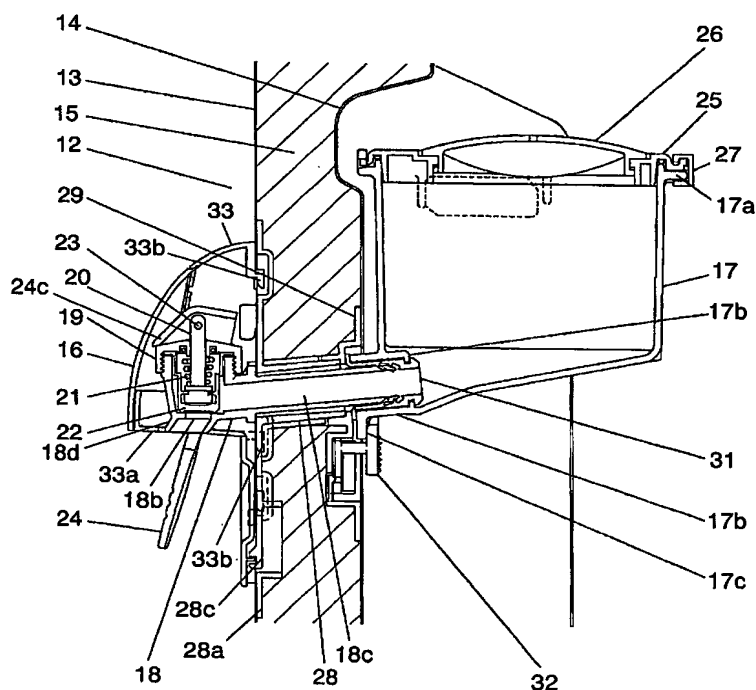

(57) Abstract: A refrigerator includes water storage tank (17) disposed at a higher place inside the door, water feeder (16) placed on a front face of the door, and water feeding tube (18) coupling tank (17) to feeder (16). Tube (18) slants upward from water feeder (16) to storage tank (17).

WO 2005/036077 A1

BEST AVAILABLE COPY

BEST AVAILABLE COPY



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*